




# HOT MELT APPLICATOR STANDARD SERIES


### BS - 10. 20 APSV

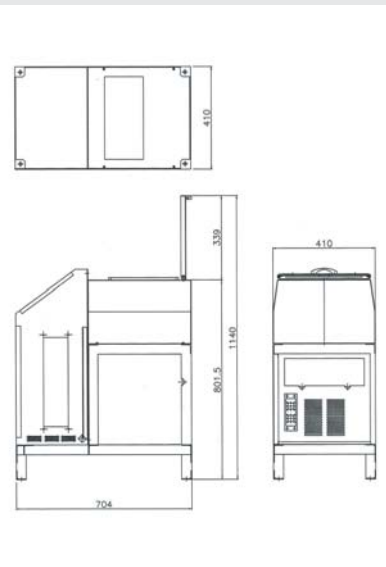

- Capacity of tank : 10, 20kg
- Melting ability : 16kg/hr
- Hose to be used : 4 pieces MAX
- Pump : 2pieces
- Capacity of pump: 1, 1.7, 2.9, 5, 10 cc/rev
- Electrical power : 1ϕ 220VAC 50~60Hz  
10kw MAX
- Size : 410(W)×704(D)×845(H)

- 탱크 용량 : 10, 20kg
- 용융능력 : 16kg/hr
- 사용호스 : 4pieces MAX
- 펌프수량 : 2pieces
- 펌프용량 : 1, 1.7, 2.9, 5, 10 cc/rev
- 정격전압 : 1ϕ 220VAC 50~60Hz, 10kw MAX
- 생산LINE속도와 H/M연동 토출제어, 정밀 분사용


### BS - 30 APSV

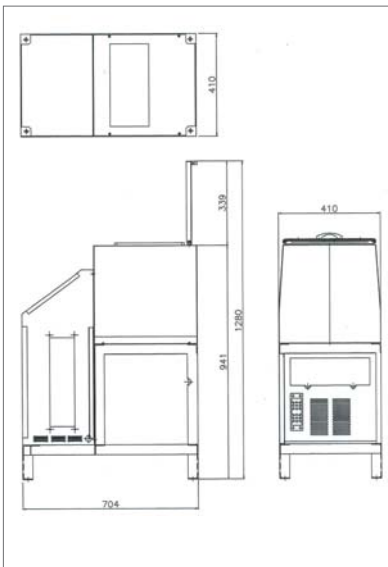

- Capacity of tank : 30kg
- Melting ability : 16kg/hr
- Hose to be used : 4 pieces MAX
- Pump : 3pieces
- Capacity of pump: 1, 1.7, 2.9, 5, 10 cc/rev
- Electrical power : 1ϕ 220VAC 50~60Hz  
10kw MAX
- Size : 410(W)×704(D)×941(H)

- 탱크 용량 : 30kg
- 용융능력 : 16kg/hr
- 사용호스 : 4pieces MAX
- 펌프수량 : 3pieces
- 펌프용량 : 1, 1.7, 2.9, 5, 10 cc/rev
- 정격전압 : 1ϕ 220VAC 50~60Hz, 10kw MAX
- 생산LINE속도와 H/M연동 토출제어, 정밀 분사용

### BS - 60 APSV

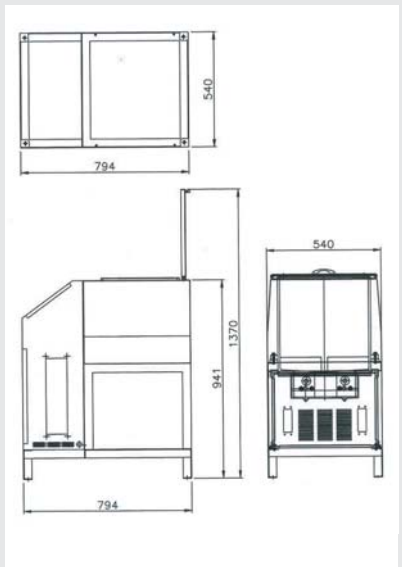

- Capacity of tank : 60kg
- Melting ability : 16kg/hr
- Hose to be used : 4 pieces MAX
- Pump : 3pieces
- Capacity of pump: 1, 1.7, 2.9, 5, 10 cc/rev
- Electrical power : 1ϕ 220VAC 50~60Hz  
13kw MAX
- Size : 540(W)×794(D)×941(H)

- 탱크 용량 : 60kg
- 용융능력 : 16kg/hr
- 사용호스 : 4pieces MAX
- 펌프수량 : 3pieces
- 펌프용량 : 1, 1.7, 2.9, 5, 10 cc/rev
- 정격전압 : 1ϕ 220VAC 50~60Hz, 13kw MAX
- 생산LINE속도와 H/M연동 토출제어, 정밀 분사용